

SINE



Power Makes the Difference



sineworld.com

LINEVERSE



Silver Alloy -- 12AWG
Better conductivity than pure silver or copper. A big upgrade to the transmission efficiency.



Multi-Minerals
Adding unique ratio carbonized and special minerals in the tube zone leads to the reduction of statics and electric charges



MONO Copper -- 8AWG
60% lower resistant than normal oxygen free copper. Smoother path for your power supply.



Thermal Cycle
All conductors had annealed at +700°C and then cryogenically treated at -196°C



S 60A Pt

Dual Magnetic Conduit Conditioner

Special Made Dual Magnetic Power Conduits
3 independent compensation circuits

12 AWG solid-core copper x 4 used in internal wiring

Maximum Loading: 8000W(220 V)
4000W(110 V)

Lightning and surge protection

Schuko version / US 15A version / UK 13A version

Net Weight: 12 kg





MINIVERSE	SUTRA PC	CANTON PC	LOUIS X PC
Thermal Cycle treatment	-196°C cryogenic treatment applied to whole cable		
8AWG silver-plated wire X2 8AWG MONO Copper X2	10AWG silver-plated wire X2 14AWG special copper wire X2 16AWG special copper wire X2	12AWG multi-strand silver x 2 12AWG solid copper x 2	12 AWG solid-core copper x 2 12 AWG multi-strand copper x 2
Nylon anti-static shielding		Double twist wire-weaving patterns	Special wire-weaving patterns
Ultra carbon zone to absorb electronic interference	5 insulation layers with anti-RFI shielding		4 insulation layers against EMI and RF interference
Multi coil wire twist method to minimizes EMI and RFI distortion			
6 insulation layers with anti-RFI shielding			
Length 1.8m			



ZUNMU PC	NIDAS HC+	NIDAST PT	NIDAST PC
Design for SOURCE	High Current		
-196°C cryogenic treatment applied to whole cable Extra soft tubes design to absorb electronic vibration			
Polyethylene insulation	105°C High-temperature resistance insulation layer to enhance the safety & stability		
MONO Copper	Special Optimized OFC		
Multi levels copper shielding	Overall Copper foil shielding		
15 AWG (300V / 19A)	10AWG (300V / 30A)	13AWG (300V / 23A)	
Extra-thick platinum-plated cryo connector			High grade connector
Length 1.8m			Length 1.5m

*Available Plugs: Schuko / US 15A / UK 13A




LINEVERSE SC	MINIVERSE SC
Thermal Cycle treatment +700°C to -196°C	
MONO Copper (5 AWG)	Comprises of top-quality copper and astro-industrial-grade silver wire
Multi-Minerals Zone	Ultra Carbon Zone
Special anti-RFI shielding	6 insulation layers with anti-RFI shielding
Multi coil wire twist method to minimizes EMI and RFI distortion	
Cryo Banana or Spade (Platinum)	
Length 3m	



SUTRA SC	LOUISX SC	ZUNMU SC
-196°C cryogenic treatment applied to whole cable		-196°C cryogenic treated
Tube structure with carbon minerals		Soft tube design to absorb electronic vibration
top-quality 10 AWG silver-plated 16 AWG solid core copper 14 AWG solid core copper	12AWG solid copper x 4	Superior MONO Copper as main conductors
6 insulation layers with anti-RFI shielding	Special wire-weaving patterns	Multi levels copper shields
5 insulation layers and nylon anti-static shielding		Polyethylene insulation
Cryo Banana or Spade with platinum-plated		
Length 3m	Length 2.8m	Length 2.5m

* Connector Types: banana / spade

GATEWAY 3

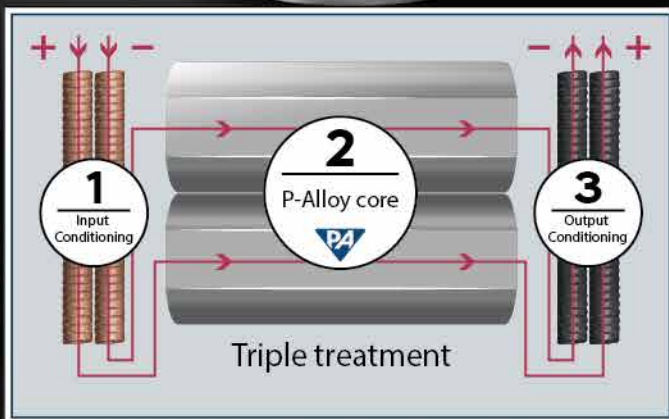

Gateway 3 PA is our latest flagship power conditioner. It has adopted a new design with our unique metal ratio P-Alloy core.

GATEWAY 3 PA

Flagship P-Alloy Power Conditioner

Maximum continuous power: 11100W (220V)

Total transient power: 17600W (220V)

Dimensions: (W)408mm (D)295mm (H)193mm

Net Weight: 24 kg

Gross Weight: 26.5 kg

When the current enters gateway 3, it will receive a triple treatment. First, the current will receive an input treatment via a magnetic conduit. Second, our P-Alloy core's new multi-layer noise control structure will play a key role in conditioning. In the end, the output treatment is through another magnetic conduit.

P-Alloy core





LINEVERSE IC	MINIVERSE IC	ELLAX IC	OPHELIA IC	TIMON IC
Thermal Cycle treatment		-196°C cryogenic treatment applied to whole cable		
18 AWG Silver Alloy X2 18AWG MONO copper X2	18 AWG Silver-plated MONO Copper	22 AWG multi-strand silver-plated copper wire	16 AWG multi-strand copper	17 AWG solid copper
Multi coil wire twist method minimizes EMI and RFI distortion			Double twisting pattern	2 insulation layers
ultra minerals zone	ultra carbon zone	DuPont KAPTON shielding	Copper Shielding	
A dual shielding layer	6 insulation layers	4 insulation layers		
Length 1.5 m				




SINE takes the metal conductors, cables to -196°C , a near absolute zero temperature environment for 24 to 48 hours. In that deep cold environment, the strength of the atomic bonds starts to diminish, the materials improved from a chaotic structure to a well orderly manner.




By using the cryogenic treatment, stress within the metal are being relieved. it significantly reduces the stress within the conductors that caused poor sound quality.

A notable increases in the quality of sound and visual reproduction can be achieved by using deep cryogenic treated high quality cables as well as others metal components.

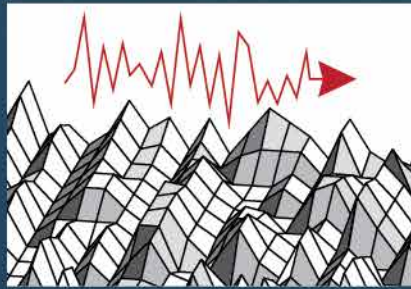

Before Cryogenic Treatment

Conductors contains internal stresses that degrade performance. Lower conductivity

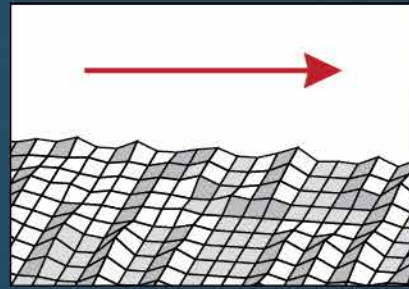

After Cryogenic Treatment

Stress is relieved and makes the conductor perform much better. Higher conductivity

ZUNMU



MONO COPPER

MONO Copper has better conductivity than polycrystalline metals, between atoms and metal crystals, the oxidation or contamination has been removed during production, it realize the ultimate performance of metallic conductors. However it is very expensive to produce and only used in high performance applications.

High Quality Powercord

Power for SOURCE

Specifications:

- MONO Copper
- 15 AWG / 1.65mm^2 (300V / 19A)
- -196°C cryogenic treated
- Polyethylene insulation
- Overall copper braiding
- Soft tube design to absorb vibration




Power for SOURCE

Length: 1.8 m
Available Plugs: Schuko / US / UK




CRYO Power Solution

Main Power Distribution box



Cryo MCB



Cryo Gold Busbar

NIDAS HC+



10 AWG / 5.26mm²
(300V / 30A)
High Current
dedicated power line



Concentric
wire structure

CRYO
-196°C



SW 2p us
Cryo Power Socket


NIDAS+




13 AWG / 2.62mm²
(300V / 23A)
Low Current
dedicated power line



Concentric
wire structure

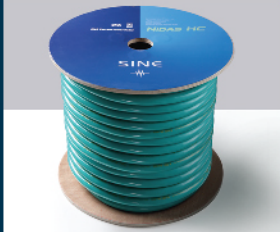

NIDAS HC+
High Current Power cable
10AWG / 5.26mm² (300V / 30A)



NIDAS+
Power cable
13AWG / 2.62mm²(300V / 23A)



LINCOLN
Speaker cable
16AWG / 1.31mm² x 2

Worldwide Distributor:

MIC Audio

2/F Grancastle Commercial Centre,
2T Sai Yeung Choi St South, Mong Kok, Hong Kong
Tel: (852) 3188 0144
e-mail: info@micaudio.com

sineworld.com

© MIC Int. Ltd. All rights reserved. SINE, the SINE logo and the CRYO logo are trademarks or registered trademarks of MIC Int. Ltd.

The information given in this document is correct at the time of print. Small production changes may arise due to our ongoing research and products improvement.

Dealer: